

Floating Tripod Oil Skimmer

Skimoil's floating Tripod skimmers can be ordered as standard equipment or can be engineered to meet customers' unique requirements.

INDUSTRIES SERVED

- Offshore/Onshore Produced Water Treatment
- Petrochemical and Refining
- Power Generation
- Food Processing
- Steel Manufacturing
- Marine/Groundwater Remediation
- General Heavy Industry

MATERIAL

- 304 Stainless steel funnel
- Stainless steel pipe and couplings
- Zinc plated swivel adapter
- Water suction PVC hose
- Rotating handle height for maximum oil suction




Floating Tripod skimmers are used in conjunction with the full line of skimmer products from SkimOil.

WWW.SKIMOIL.COM

Floating Tripod Oil Skimmer

How Floating Tripod Skimmers Operate

Floating Tripod skimmer utilize three main elements to complete a skimming job. The first is a set of three floats; composed of 304 stainless steel, the floats remain buoyant on the surface. The second is the adjustable handle, this allows you to turn the mechanism so that it reaches the desirable depth of the oil floc. The third element is the funnel. Also composed of stainless steel, the funnel directs the collected oil down through the PVC tube and into the collecting receptacle.

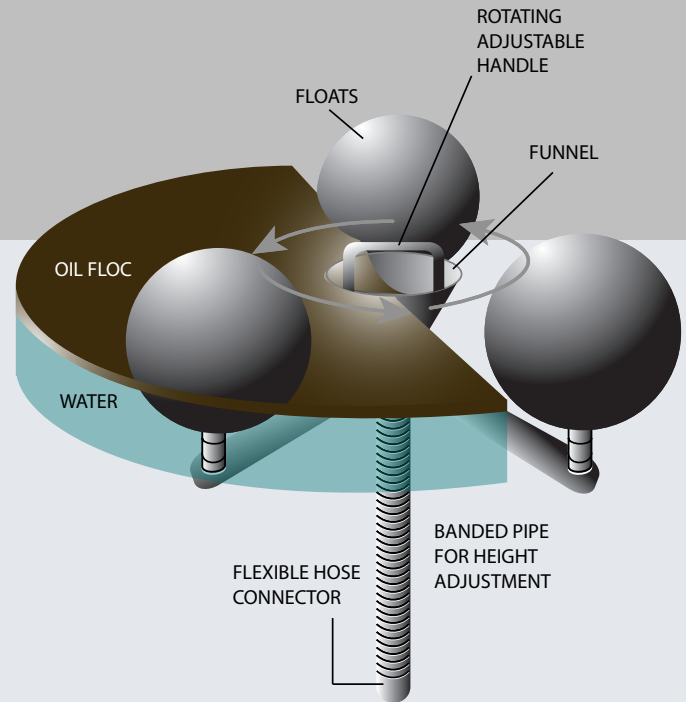

| SPECIFICATIONS | TSK-1 | TSK-2 | TSK-3 | TSK-4 |
|----------------------|---------------------|---------------------|---------------------|---------------------|
| FRAME MATERIAL | 304 STAINLESS | 304 STAINLESS | 304 STAINLESS | 304 STAINLESS |
| FLOAT MATERIAL | 304 STAINLESS | 304 STAINLESS | 304 STAINLESS | 304 STAINLESS |
| SWIVEL MATERIAL | 304 STAINLESS | 304 STAINLESS | 304 STAINLESS | 304 STAINLESS |
| ADJUSTMENT MECHANISM | MANUAL SCREW | MANUAL SCREW | MANUAL SCREW | MANUAL SCREW |
| SWIVEL SEATS | VITON | VITON | VITON | VITON |
| SWIVEL CONNECTION | 1" QUICK DISCONNECT | 2" QUICK DISCONNECT | 3" QUICK DISCONNECT | 6" QUICK DISCONNECT |
| DIMENSION | 19"DIA. X 12"H | 30"DIA. X 29"H | 40"DIA. X 3'H | 5'DIA. X 3'H |
| UNIT WEIGHT | 23 LBS | 115 LBS | 135 LBS | 445LBS |